

Front hitch for ZTX tractors

MDI 5 Front hitch



- MDI 5 is designed as an integrated part of the tractor. The maneuverability is fully retained.
- MDI is fully compatible with **standard and suspended front axle, the LAFORGE front PTO.**
- **Maintains the ground clearance.**
- **Big pack weight compatible.**

TECHNICAL DATA:

- Lift capacity at ball end 5 000 kg/ 11,000 lb.
- Lift range 750 mm/ 29.5 inch
- Double acting hydraulics with full down-pressure
- Lower link assembly with independent flotation and foldable arms
- Standard: Cat 3N (825 mm/ 32.5 inch) width
- One-piece welded frame
- Tow hook and top link with storage position
- 2 positions for the top link



Compact: Minimal overhang from the front face



The parallel folding principle ensures functionality of float mode.



The McCORMICK weights are nicely integrated with the hitch.



LAFORGE

FRONT HITCHES FOR Mc CORMICK MC Power6, MTX and ZTX TRACTORS



Note: For heavy duty applications: Plows, dozer blades, rippers, etc., contact LAFORGE.

LAFORGE SARL

Pôle d'activités - Route de Soissons
02190 GUIGNICOURT - FRANCE
Tel (33) 3.23.79.85.85. Fax (33) 3.23.79.81.75.
email : commercial@laforge.fr
Web site : www.laforge.fr

LAFORGE SYSTEMS Inc

4425 C Treat Blvd, Suite 230
CONCORD - CA 94521 - USA
Phone (925) 827 2010 - 1 800 422 5636
Fax : (925) 689 7198
email : lars@fronthitch.com web site : www.fronthitch.com

Check maximum axle load and tire pressure (in relation with travel speed) with McCORMICK and tire manufacturer. LAFORGE's responsibility is limited to our product. Specifications and design subject to change with notice. 01/05.



Front hitch for MC Power6 tractors

MDI 3.8 Front hitch



- MDI 3.8 is designed as an integrated part of the tractor. The maneuverability is fully retained.
- MDI 3.8 is compatible with both **the standard MFD and the suspended front axle. It's also compatible with a LAFORGE front PTO.**
- The lift arms converge when folded for **improved compatibility with narrow front end loader booms.**
- **Maintains the ground clearance.**
- **Compact:** Minimal overhang from the front face.
- **Big pack weight compatible.**



TECHNICAL DATA:

- Lift capacity at ball end 3 800 kg/ 8,360 lb.
- Lift range 700 mm/ 28.6 inch
- Double acting hydraulics with full down-pressure
- Foldable arms
- One-piece welded frame
- Standard reinforcing push bar
- Tow hook and top link with storage position


LAFORGE front PTO

LAFORGE front PTO for Mc Power6, MTX and ZTX

Counter ISO rotation (looking at the shaft)* 1000 rpm

Some features of the front PTO designed and built by LAFORGE:

- Wet clutch with modulated engagement.
- Maximum output: 170 HP
- Manual output shaft indexing for easier drive-line coupling.
- An optional oil cooler kit is available for heavy duty applications.

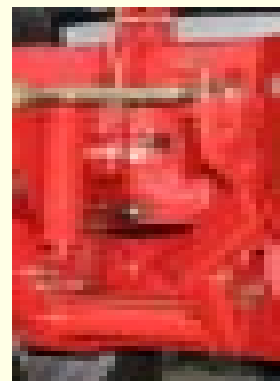

*Only PTO systems with ISO standard rotation are available in North America. Contact Laforge for information.

Front hitch for MTX tractors

MDI 3.8 Front hitch



- MDI 3.8 is designed as an integrated part of the tractor. The maneuverability is fully retained.
- MDI 3.8 is compatible with both **the standard MFD and the suspended front axle. It's also compatible with a LAFORGE front PTO.**
- The lift arms converge when folded for **improved compatibility with narrow front end loader booms.**
- **Compact:** Minimal overhang from the front face.
- **Maintains the ground clearance.**
- **Big pack weight compatible.**

TECHNICAL DATA:

- Lift capacity at ball end 3 800 kg/ 8,360 lb.
- Lift range 700 mm/ 28.6 inch
- Double acting hydraulics with full down-pressure
- Foldable arms
- Tow hook and top link with storage position
- One-piece welded frame

MDI 4 and MDI 5 Front hitches



MDI 4 with suspended front axle. The maneuverability is fully retained.

- MDI 4 and MDI 5 are designed as an integrated part of the tractor. The maneuverability is fully retained.
- MDI 4 and MDI 5 are compatible with both **the standard MFD and the suspended front axle. It's also compatible with a LAFORGE front PTO.**
- Folding arms are standard for **improved compatibility with front loaders.**
- **Compact:** Minimal overhang from the front face.
- **Maintains the ground clearance.**
- **Big pack weight compatible.**



MDI 4 Folded. Minimal overhang from the front face.



TECHNICAL DATA:

- Lift capacity at ball end MDI 4: 4 000 kg/ 8,800 lb.
MDI 5: 5 000 kg/ 11,000 lb.
- Lift range 750 mm/ 29.5 inch
- Double acting hydraulics with full down-pressure
- Lower link assembly with independent flotation and foldable arms
- One-piece welded frame
- Tow hook and top link with storage position
- 2 positions for the top link

Important: Only the parallel folding principle ensures functionality of float mode.

Note: For heavy duty applications: Plows, dozer blades, rippers, etc., contact LAFORGE.